


RROSD PRO PDB

USER MANUAL

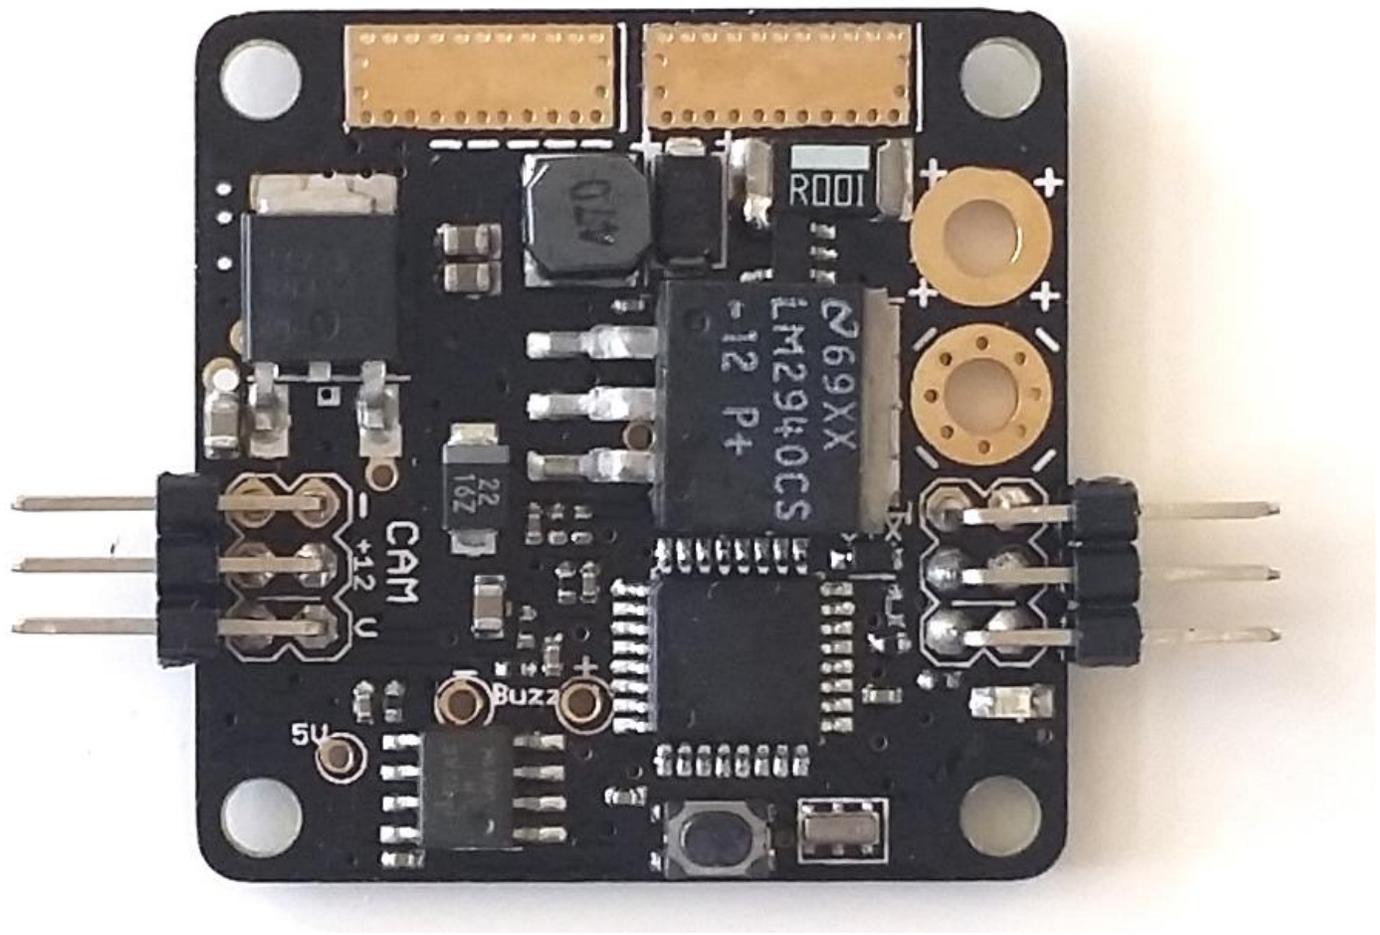

PROUDLY DESIGNED AND DISTRIBUTED BY:

REDROTOR RC

PRECAUTIONS & WARNINGS

- **Disclaimer!!** - Please understand that quadcopters are potentially dangerous machine. Use the highest level of precaution when working with hot solder iron, Lipo battery and motors. Make sure to remove props from motor throughout the entire building process.
- **Solder equipment** – Be sure to use a high quality soldering iron with a large tip especially when soldering the battery and ESC connections.
- **! – Power output on CAM 5V/12V connector** – Because a linear regulators are used, limit the current draw to less than 500mA on 12V and 250mA on 5V rail to prevent overheating
- **! – Battery Polarity** – Be sure to hook up your battery leads to the proper pads. Positive lead is clearly marked with ++++ and Negative lead with ----. Reversing this can potentially damage your board
- **! – Power/Ground wire soldering** – Caution must be taken when soldering wires to the power and ground pads on the PDB. There are many sensitive components on the PDB board that a hot soldering iron can ruin or de-solder if carelessly placed



FLEX POWER DISTRIBUTION BOARD (PDB)


What is RROSD-PRO PDB?

Simply put, the RROSD PRO PDB is an easy to use power distribution board and OSD designed to maximize FPV experience while minimizing mini quad build time and reducing the wire clutter mess!

Built-in features


- Thick copper and wide power routing to handle the most demanding power setup
- Dimension 36mm x 36mm (30.5mm x 30.5mm mounting holes)
- Built-in power distribution and beefy regulators to handle 3S-6S Lipo
- Built in multi stages power filter for Video Transmitter and Camera with pre-installed and conveniently located connectors
- 12V and 5V output: can be used for FPV cam and accessories
- NTSC and PAL can be easily selected using the onboard button
- Plug and Play (PnP) OSD information: Flight pack voltage, current draw, total current consumption, RSSI, flight timer.
- Maximum motor current 100A total
- Automatic flight timer shows actual flight time
- The additional lost model buzzer sounds off 5 minutes after the quad has crashed.
- Auto RSSI detection (FRsky ppm and analog compatible) displays in percentage
- Battery pack alarm feature blinks the battery voltage when pack voltage hits the set limit
- Onscreen menu allows user to calibrate pack voltage reading, rssi input, battery alarm level...etc....
- Firmware upgradable to ensure any user can enjoy any new features that we might release the future (optional programmer is needed)
- Lost model Siren (optional Buzzer)

PDB Connection Diagram

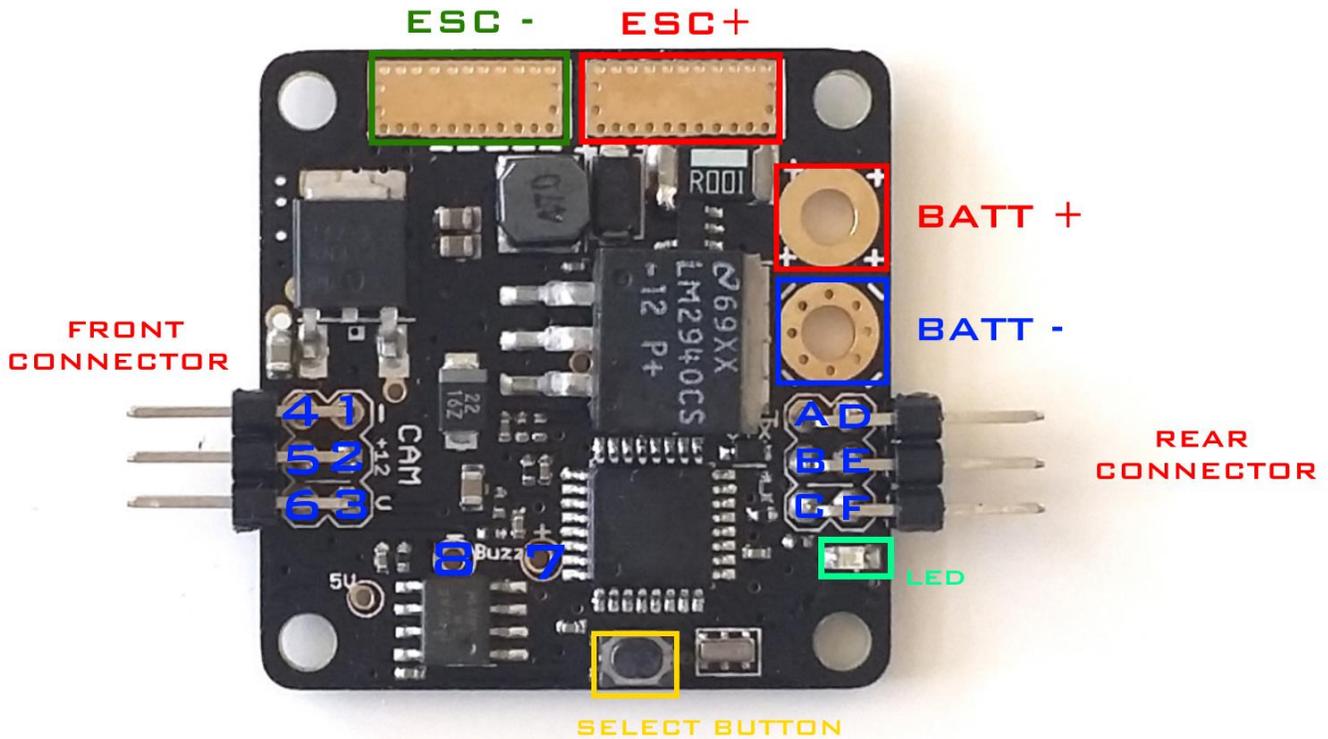

- **BATT +** => Flight battery positive input 3S – 6S
- **BATT -** => Flight battery negative input
- **ESC +** => ESCs positive input (top and bottom)
- **ESC-** => ESCs negative input (top and bottom)
- **LED** => Indicator led
- **Select Button** => Function selection button
- **Front Connector Pin Description:**
 1. Ground
 2. +12V regulated FPV camera, 500mA max
 3. Video Signal
 4. Ground
 5. +5V regulated (flight controller), 250mA max
 6. RSSI Input – Use a female-female servo cable to connect to the receiver RSSI signal, pwm and analog compatible. There's a built in signal conditioning circuit to convert pwm rssi to analog voltage. Example: ch-2 on Frsky D4R receiver
 7. Buzzer +5
 8. Buzzer Ground

- **Rear Connector Pin Description:**
 - A. Ground
 - B. Video transmitter filtered regulated 12V power
 - C. Video transmitter video signal
 - D. Programmer Pin2
 - E. Programmer Pin3
 - F. Programmer Pin4

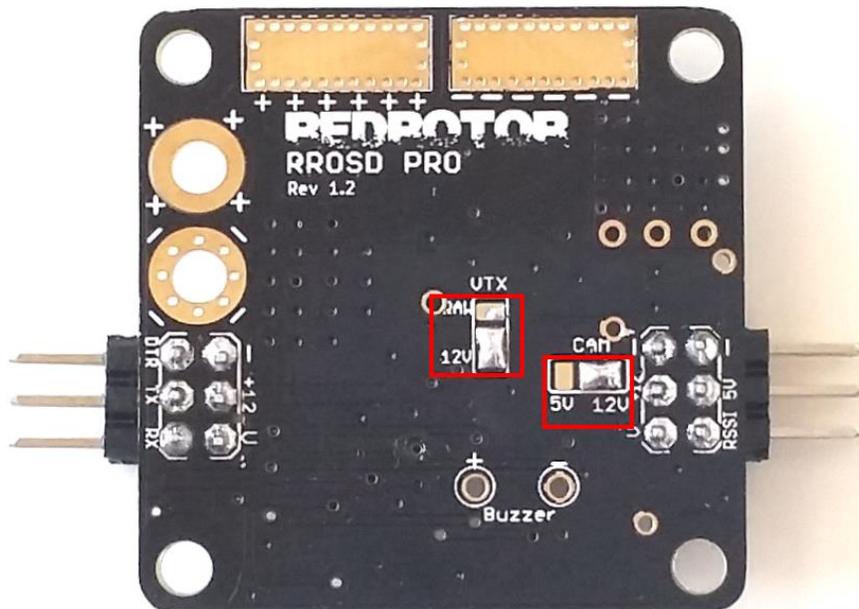

- **Solder Bridge Setting:**
 - A. VTX – Connect Middle pad and ‘RAW’ or ‘12V’ pad to set VTX voltage to Battery input and regulated 12V respectively
 - B. CAM – Connect middle pad to ‘5V’ or ‘12V’ pad to set CAM voltage

CONTROLLING THE RROSD

*These Instructions apply to the latest FW release only. All boards are loaded with the latest release from the factory.

CHANGE VIDEO MODE (NTSC/PAL)

Hold down the Button for 10 seconds upon powering up the RROSD Pro. The LED will flash 5 times to indicate that the Video mode has been successfully changed

MENU OPERATION

To enter into the menu of the RROSD, power up the board and hold down on the button on The RROSD Pro board **within 3 seconds** of powering up. Keep it depressed until the menu appears in your view then release.

To navigate through the menu single click the button to move down an option. Long press to select an option

RSSI Calibration: To calibrate your RSSI reading, select the high reading with your radio and receiver powered on and nearby. Flip off the radio and select the low reading to calibrate the bottom signal range. *The reading you will see on the OSD is the true received strength of the signal (more accurate and different from a 2 way telemetry signal being sent from a receiver)

Voltage Calibration: This menu item lets you calibrate your voltage reading by entering your own offset.

Set Voltage Alarm: Allows you to set both a voltage alarm. This will cause the respective indicator to blink on screen when the desired value is reached


Set mAH Alarm: Allows you to set mAh consumption alarm. This will cause the respective indicator to blink on screen when the desired value is reached. We recommend setting mAH to 80% of the battery capacity.

Enable Background Shade: Allows you to enable or disable the darkened bar behind the OSD text for readability under intense sunlight.


Exit: Exits the Menu

FIRMWARE UPDATING

- Download the Firmware Upgrade Utility software from http://redrotorrc.com/download/RRLoader_V2.zip
- Unzip and run the installer (RRLoader.msi)
- Connect the USB-to-Serial dongle (RR-PRGM) to a PC running Win XP/7/8 and make note of the installed COM #
- You can also go Device Manager to find out the COM number

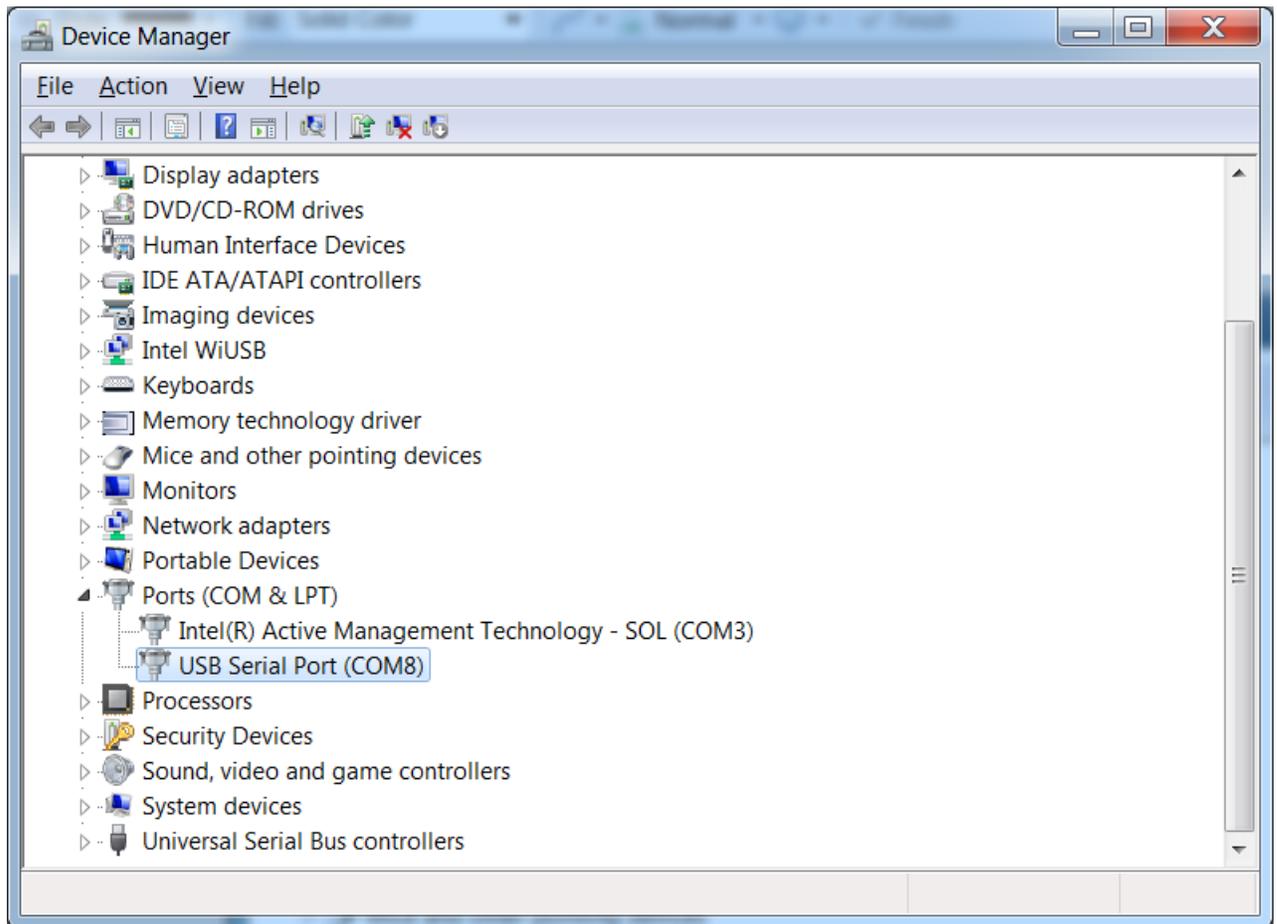

- Connect the USB dongle to RROSD Expansion port as shown. Make sure the battery is unplugged from your RROSD Pro.
- Launch the RR Loader shortcut and enter the correct port Number.

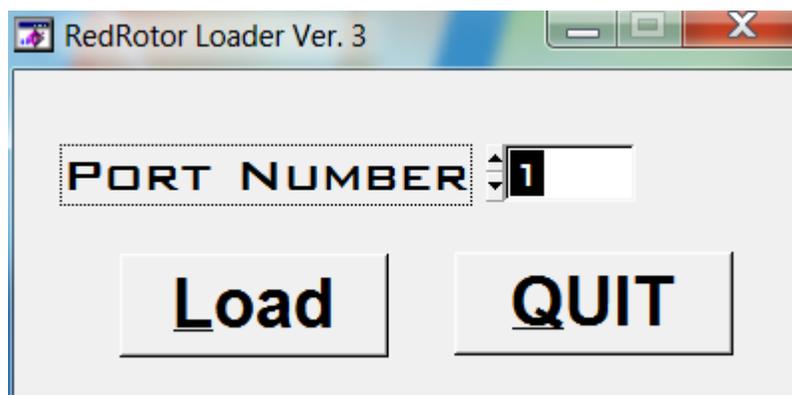

- Plug battery into RROSD Pro. (not time sensitive)
- Choose the correct COM number, and click “Load”

- Remove power and disconnect programmer from RROSD when firmware loading is finished and gives you a success message.
- Power up RROSD Pro and the OSD version listed on initial boot-up on the on screen display should be updated if everything worked correctly.
- If you get an error message make sure you COM port is correct and you've followed instructions exactly. Try a different USB port or PC and try the alternate method